


SST1 INSTALLATION INSTRUCTIONS

SST1 STOCK SADDLE

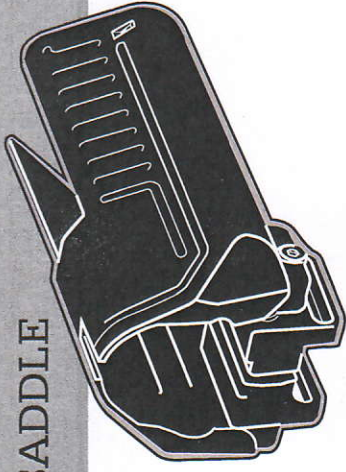

WARNING!

Always make sure weapon is unloaded and the chamber is clear before starting any weapon modification



1 Press 2 hexagon nuts into each mounting block. 1 in the back center hex hole (a) and 1 in the upper left hex hole (b), as shown in the picture.

Tip: Put the nuts on the end of screw & use the screw to position the nut in the hexagonal hole. Remove the screw when the nut is positioned correctly.



2 Fit a mounting block to the stock's sling cavity on each side (inset). Secure mounting blocks with 2 long screws (one on each side).

Tip: Do not fully tighten mounting block until stock saddle is mounted in correct position. Then fully tighten mounting block.




3 Secure the saddle stock with the short screws to the mounting block.



4 Close storage compartment with supplied plugs. Push and turn until plug lock fits in saddle. Use para cord to attach plug to stock to prevent loss of plugs.

Part List

- Stock Saddle Body
- 2 Battery Plugs
- 2 "O" Rings
- 2 Long Screws (M3 x 0.5 x 25mm)
- 2 Short Screws (M3 x 0.5 x 16mm)
- 1 Hex Key M2.5
- 4 Hex Nut (Me x 0.5)
- 2 Mounting Blocks

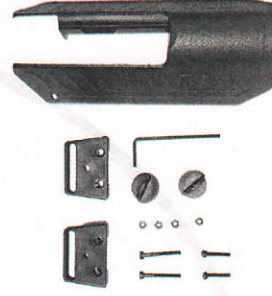

WWW.COMMANDARMS.COM
 USED BY MILITARY AND LAW ENFORCEMENT WORLDWIDE
 911 William Leigh Dr. Tullytown PA, 19007

E: info@commandarms.com
 P: 215-949-9944 • 1-866-611-9576 • F: 215-949-9191

CAA
 UPGRADE YOUR WEAPON